




PROJECT

TYPE


NOTES

QUANTITY

DATE



Round ceiling recessed downlight made from die-cast aluminium; adjustable; trimless; surface Black Matt; powder coated, matt texture; RAL 9011; installation without tools using alu plasterkit; to be combined with the plasterkit suitable for ceiling thickness; recessed depth 95mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 15°; 355° rotatable and 35° tiltable; degree of protection IP20; Class 3; IC rated; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



LUMINAIRE

Ceiling
Recessed
tilt max 35 °
rotation 355 °
Black Matt
RAL 9011 ^a
IP20
Interior
600 lm / 350mA
805 lm / 500mA

LED MODULE

2700 K
CRI ≥ 90
L80 / 55000h
 ≤ 2 SDCM (initial MacAdam)
750 lm / 350mA
126 lm/W ^b
5,9 W ^b

OPTICAL

Narrow
beam angle 15°
CIE flux code: 88 99 100 100 100

ELECTRICAL

excl. driver
17 V
Class III

PHYSICAL

diameter 96 mm
height 85 mm
0.23 kg
alu plasterkit



CUTOUT

diameter 105-110 mm
recessed depth 95 mm
12,5, 15, 20, 25

^a Colour may deviate slightly due to production conditions

^b Without electrical and optical losses

LIGHT DISTRIBUTION

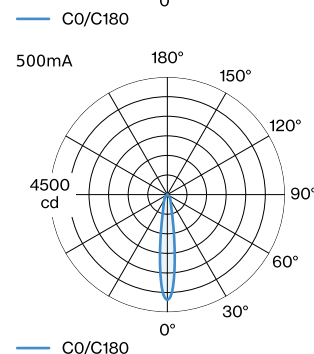



CONE DIAGRAM

narrow 16° 350mA			narrow 16° 500mA		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	2990	0.28	1	4030	0.28
2	750	0.55	2	1010	0.55
3	330	0.83	3	450	0.83
4	190	1.11	4	250	1.11
5	120	1.39	5	160	1.39

Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.99	0.98	0.97	0.96	0.95
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF

MF Maintenance Factor

LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL ACCESSORIES

DRIVER

TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
10W 500mA 13-20V 220-240VAC		13-20V	60-39-20	90214406
10W 500mA 12-21V phase-cut dim 220-240VAC		12-21V	115-41-25	90224403
15W 500mA 10-31V DALI-2 push dim 220-240VAC		10-31V	166-29-21	90244501

MOUNTING ACCESSORIES

PLASTERKIT

TYPE	COLOUR	VOLTAGE	Ø·H (MM)	ITEM NUMBER
DEEP ADJUST TRIMLESS			105-29	90017209