




PROJECT

TYPE

NOTES

QUANTITY

DATE

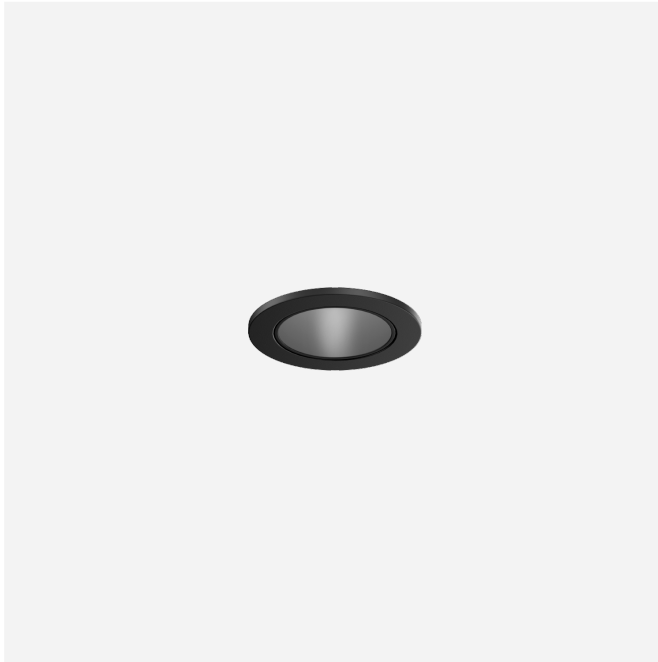

Round ceiling recessed downlight made from die-cast aluminium; with trim; surface Black Matt; powder coated, matt texture; RAL 9011; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 50mm; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; CRI $\geq$ 90; beam angle 32°; degree of protection IP20; Class 3; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

LUMINAIRE

Ceiling
Recessed
Black Matt
RAL 9011 ^a
IP20
Interior
315 lm

LED MODULE

2700 K
CRI $\geq$ 90
L80 / 50000h

OPTICAL

Medium (standard)
beam angle 32°

ELECTRICAL

excl. driver
17 V
Class III

PHYSICAL

diameter 35 mm
height 45 mm
0.06 kg
wire springs

CUTOUT

diameter 28-31 mm
min. ceiling thickness 4 mm
max. ceiling thickness 25 mm
recessed depth 50 mm

^a Colour may deviate slightly due to production conditions



**ELECTRICAL ACCESSORIES**

DRIVER TYPE	COLOUR	VOLTAGE	L·W·H (MM)	ITEM NUMBER
6W 250mA 8.6-24V 100-240VAC		8.6-24V	55·39·22	90216201
5W 250mA 12-21V phase-cut dim 220-240VAC		12-21V	68·33·22	90226201
10W 250mA 16-40V phase cut TE IP65 110-240VAC		16-40V	44·27·20	90226404
10W 250mA 10-40V DALI-2 push dim 220-240VAC		10-40V	166·29·21	90246403