

## LECA SURFACE 1.0

188264Q3



PROJECT			
ТҮРЕ			
NOTES			
QUANTITY			
DATE			



Ceiling surface luminaire with 1 spotlight; made from die-cast aluminium; surface Bronze; wet painted, matt smooth; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; binning initial MacAdam  $\leq$  2 SDCM; CRI  $\geq$  90; beam angle 31°; spotlight head 350° rotatable and 90° tiltable; degree of protection IP20; Class 1; driver included; optional optical accessories available; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

# 26 140 55 ø32

#### GENERAL

Ceiling
Surface
tilt max 90 °
rotation 350 °
Bronze
IP20
Interior
585 lm
CIE flux code: 93 98 100 100 100

#### LED

2700 K	
$CRI \ge 90$	
L80 / 50000 h	
initial MacAdam ≤ 2 SDCM	

#### OPTICAL

Standard	
beam angle 31°	

#### ELECTRICAL

phase-cut dim	
220 - 240 V	
system 7.9 W	-
Class 1	

#### PHYSICAL

diameter 32 mm	
height 55 mm	
0.4 kg	


['188264Q3'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



## LECA SURFACE 1.0

188264Q3

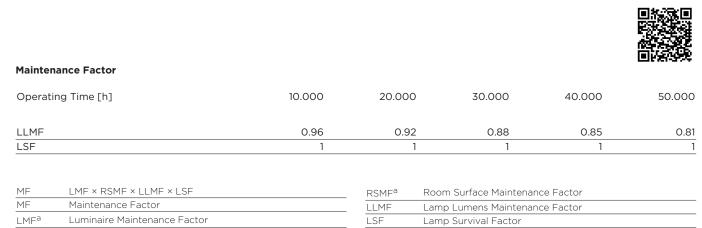

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

### **OPTICAL ACCESSORIES**

Honeycomb Louver			
Туре	Colour	Ø (MM)	Item number
BLIEK PETIT   CENO   LECA   PIRRO	Black	29	90051131

['188264Q3'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 10%. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.