


RAY WALL 2.0 Loxone

34214LQ9



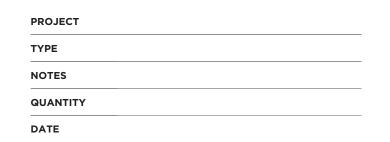

Cylindrical wall surface mounted luminaire made from aluminium; surface Bronze; wet painted; brushed; direct/indirect light distribution; PCB 3-step binning; light colour 1800 K - 3000 K colour warm dimming; CRI \geq 90; 24 V; degree of protection IP20; Class 3; driver included; inclusive flaps for adjustable beam angle; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

GENERAL

Wall	
Surface	
Bronze	
IP20	
Interior	
total 900 lm	

LED

colour warm dimming	
1800 K - 3000 K	
$CRI \ge 90$	
initial MacAdam \leq 3 SDCM	

OPTICAL

Variable

ELECTRICAL

excl. power supply
24 V
system 15.0 W
Class 3

PHYSICAL

diameter 150 mm
neight 100 mm
0.86 kg



['34214LQ9'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com