



**PROJECT**

---

**TYPE**

---

**NOTES**



---

**QUANTITY**


---

**DATE**

---

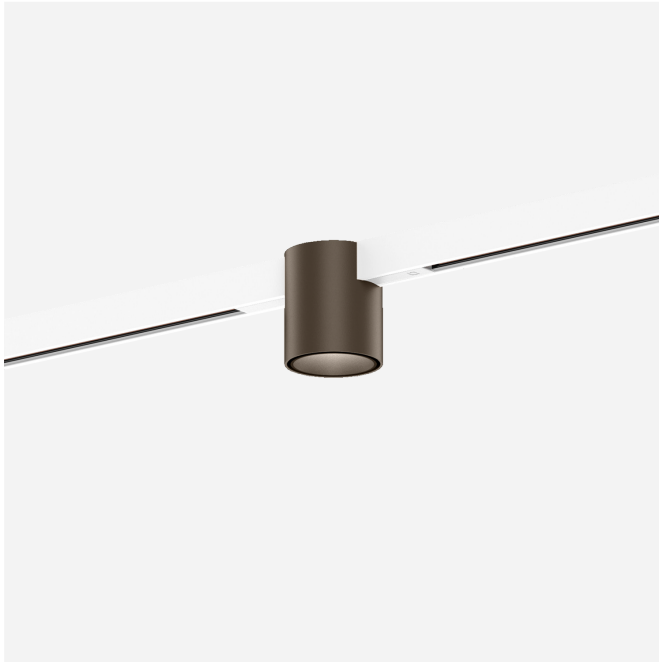

48V track downlight made from die-cast aluminium; cylindrical shape; for surface and suspended tracks; adapter in White Matt; surface housing Bronze wet painted; brushed; with inner reflector in Bronze wet painted; matt fine texture; with COB (Chip on Board) technology for maximum efficiency; non dim; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; CRI (Colour Rendering Index)  $\geq 90$ ; 48 V; degree of protection IP20; Class 3; UGR  $\leq 13$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500 \text{ cd/m}^2$ ; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by an authorized professional;



**GENERAL**

Ceiling \_\_\_\_\_  
 Track \_\_\_\_\_  
 Adapter: White Matt \_\_\_\_\_  
 Housing + Inner Reflector \_\_\_\_\_  
 Bronze \_\_\_\_\_  
 IP20 \_\_\_\_\_  
 Interior \_\_\_\_\_  
 CIE flux code: 99 100 100 100 \_\_\_\_\_  
 100 \_\_\_\_\_

**LED**

3000 K \_\_\_\_\_  
 CRI  $\geq 90$  \_\_\_\_\_  
 initial MacAdam  $\leq 2$  SDCM \_\_\_\_\_

**OPTICAL**

Standard \_\_\_\_\_  
 beam angle  $25^\circ$  \_\_\_\_\_

**ELECTRICAL**

non dim \_\_\_\_\_  
 48 V \_\_\_\_\_  
 inset 7.0 W \_\_\_\_\_  
 Class 3 \_\_\_\_\_

**PHYSICAL**

diameter 70 mm \_\_\_\_\_  
 height 82 mm \_\_\_\_\_  
 0.16 kg \_\_\_\_\_  
 adapter 171 mm \_\_\_\_\_  
 incl. Strex 48 V track adapter \_\_\_\_\_

[258262WQ5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



## TRACK ACCESSORIES

### Blank Cover 2m

| Type         | Colour | L·W·H (MM) | Item number |
|--------------|--------|------------|-------------|
| STREX system | Black  | 2000-18-3  | 911002B0    |
| STREX system | White  | 2000-18-3  | 911002W0    |

### Connector

| Type         | Colour | L·H (MM) | Item number |
|--------------|--------|----------|-------------|
| STREX system | White  | 105-18   | 90014196    |
| STREX system | Black  | 105-18   | 90014197    |

### DALI Selv Device

| Type         | L·W·H (MM) | Item number |
|--------------|------------|-------------|
| STREX system | 213-37-25  | 90019193    |

### End Cap

| Type                             | Colour    | L·W·H (MM) | Item number |
|----------------------------------|-----------|------------|-------------|
| STREX system   surface/suspended | White     | 26-2.5-29  | 90014147    |
| STREX system   surface/suspended | Black     | 26-2.5-29  | 90014148    |
| STREX system   surface/suspended | Champagne | 26-2.5-29  | 90014347    |
| STREX system   surface/suspended | Bronze    | 26-2.5-29  | 90014348    |

### L-Connector

| Type                             | Colour            | L·W·H (MM) | Item number |
|----------------------------------|-------------------|------------|-------------|
| STREX system   surface/suspended | White             | 105-105-19 | 90014198    |
| STREX system   surface/suspended | Black             | 105-105-19 | 90014199    |
| STREX system   surface/suspended | Champagne + Black | 105-105-19 | 90014398    |
| STREX system   surface/suspended | Bronze + Black    | 105-105-19 | 90014399    |

### L-Connector non-electrical

| Type                   | Colour            | L·W·H (MM) | Item number |
|------------------------|-------------------|------------|-------------|
| STREX system   surface | White             | 105-105-19 | 90014258    |
| STREX system   surface | Black             | 105-105-19 | 90014259    |
| STREX system   surface | Champagne + Black | 105-105-19 | 90014458    |
| STREX system   surface | Bronze + Black    | 105-105-19 | 90014459    |

### Power Feed

| Type         | Colour | L·H (MM) | Item number |
|--------------|--------|----------|-------------|
| STREX system | Black  | 112-18   | 90014154    |

### Suspension Set

| Type                            | Colour          | L·W·H (MM) | Item number |
|---------------------------------|-----------------|------------|-------------|
| STREX system   1.5m   suspended | Stainless Steel | 80-23-1500 | 90014160    |
| STREX system   3.0m   suspended | Stainless Steel | 80-23-3000 | 90014161    |
| STREX system   1.5m   suspended | Black           | 80-23-1500 | 90014274    |
| STREX system   3.0m   suspended | Black           | 80-23-3000 | 90014275    |

### T-Connector

| Type                   | Colour | L·W·H (MM) | Item number |
|------------------------|--------|------------|-------------|
| STREX system   surface | White  | 275-146-18 | 90014292    |
| STREX system   surface | Black  | 275-146-18 | 90014293    |


**Wireless Casambi Control**

| Type         | Colour | L-H (MM) | Item number |
|--------------|--------|----------|-------------|
| STREX system | White  | 143-58   | 90014155    |
| STREX system | Black  | 143-58   | 90014156    |

**X-Connector**

| Type                   | Colour | L-W-H (MM) | Item number |
|------------------------|--------|------------|-------------|
| STREX system   surface | Black  | 275-275-18 | 90014294    |
| STREX system   surface | White  | 275-275-18 | 90014295    |

**ELECTRICAL ACCESSORIES**
**Ceiling Driver 100W**

| Type                     | Colour | L-W-H (MM) | Item number |
|--------------------------|--------|------------|-------------|
| STREX system   suspended | White  | 439-26-44  | 90014368    |
| STREX system   suspended | Black  | 439-26-44  | 90014369    |

**Ceiling Driver 150W**

| Type                     | Colour | L-W-H (MM) | Item number |
|--------------------------|--------|------------|-------------|
| STREX system   suspended | White  | 439-26-44  | 90014372    |
| STREX system   suspended | Black  | 439-26-44  | 90014373    |

**Driver**

| Type                | Voltage | L-W-H (MM) | Item number |
|---------------------|---------|------------|-------------|
| STREX system   100W | 48V     | 350-30-18  | 90218901    |
| STREX system   150W | 48V     | 350-30-18  | 90218902    |
| STREX system   250W | 48V     | 400-40-22  | 90218903    |

**In Line Driver 100W**

| Type                     | Colour | L-W-H (MM) | Item number |
|--------------------------|--------|------------|-------------|
| STREX system   suspended | White  | 439-26-44  | 90014360    |
| STREX system   suspended | Black  | 439-26-44  | 90014361    |

**In Line Driver 150W**

| Type                     | Colour | L-W-H (MM) | Item number |
|--------------------------|--------|------------|-------------|
| STREX system   suspended | White  | 439-26-44  | 90014362    |
| STREX system   suspended | Black  | 439-26-44  | 90014363    |

**In Track Driver 100W**

| Type                     | Colour            | L-W-H (MM) | Item number |
|--------------------------|-------------------|------------|-------------|
| STREX system   surface   | Black             | 438-16-18  | 90014143    |
| STREX system   surface   | White             | 438-16-18  | 90014144    |
| STREX system   suspended | White             | 3000       | 90014157    |
| STREX system   suspended | Black             | 3000       | 90014174    |
| STREX system   surface   | Black             | 468-26-29  | 90014176    |
| STREX system   surface   | White             | 468-26-29  | 90014178    |
| STREX system   surface   | Bronze + Black    | 468-26-29  | 90014376    |
| STREX system   surface   | Champagne + Black | 468-26-29  | 90014378    |

[258262WQ5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.


**In Track Driver 250W**

| Type                     | Colour            | L-W-H (MM) | Item number |
|--------------------------|-------------------|------------|-------------|
| STREX system   surface   | Black             | 408-16-18  | 90014145    |
| STREX system   surface   | White             | 408-16-18  | 90014146    |
| STREX system   suspended | White             | 3000       | 90014158    |
| STREX system   suspended | Black             | 3000       | 90014175    |
| STREX system   surface   | Black             | 438-26-29  | 90014177    |
| STREX system   surface   | White             | 438-26-29  | 90014179    |
| STREX system   surface   | Bronze + Black    | 438-26-29  | 90014377    |
| STREX system   surface   | Champagne + Black | 438-26-29  | 90014379    |

**Power Feeder for Suspension**

| Colour        | Item number |
|---------------|-------------|
| Black Texture | 90018000    |

**TRACKS**
**Track Profile 1m**

| Type  | Colour | L-W-H (MM)    | Item number |
|---|--------|---------------|-------------|
| STREX system   surface/suspended              | White  | 1000-26-29    | 90014181    |
| STREX system   custom cut   surface/suspended | White  | 200-999-26-29 | 90014181CC  |
| STREX system   surface/suspended              | Black  | 1000-26-29    | 90014182    |
| STREX system   custom cut   surface/suspended | Black  | 200-999-26-29 | 90014182CC  |

**Track Profile 2m**

| Type   | Colour    | L-W-H (MM)      | Item number |
|--|-----------|-----------------|-------------|
| STREX system   suspended indirect light              | Black     | 2000-26-29      | 900140B5    |
| STREX system   custom cut   suspended indirect light | Black     | 1000-1999-26-29 | 900140B5CC  |
| STREX system   suspended indirect light              | White     | 2000-26-29      | 900140W5    |
| STREX system   custom cut   suspended indirect light | White     | 1000-1999-26-29 | 900140W5CC  |
| STREX system   surface/suspended                     | White     | 2000-26-29      | 90014183    |
| STREX system   custom cut   surface/suspended        | White     | 1001-1999-26-29 | 90014183CC  |
| STREX system   surface/suspended                     | Black     | 2000-26-29      | 90014184    |
| STREX system   custom cut   surface/suspended        | Black     | 1001-1999-26-29 | 90014184CC  |
| STREX system   surface/suspended                     | Champagne | 2000-26-29      | 90014383    |
| STREX system   custom cut   surface/suspended        | Champagne | 1001-1999-26-29 | 90014383CC  |
| STREX system   surface/suspended                     | Bronze    | 2000-26-29      | 90014384    |
| STREX system   custom cut   surface/suspended        | Bronze    | 1001-1999-26-29 | 90014384CC  |

**Track Profile 3m**

| Type   | Colour    | L-W-H (MM)      | Item number |
|--|-----------|-----------------|-------------|
| STREX system   surface/suspended                     | White     | 3000-26-29      | 90014185    |
| STREX system   custom cut   surface/suspended        | White     | 2001-2999-26-29 | 90014185CC  |
| STREX system   surface/suspended                     | Black     | 3000-26-29      | 90014186    |
| STREX system   custom cut   surface/suspended        | Black     | 2001-2999-26-29 | 90014186CC  |
| STREX system   suspended indirect light              | Black     | 3000-26-29      | 900141B5    |
| STREX system   custom cut   suspended indirect light | Black     | 2001-2999-26-29 | 900141B5CC  |
| STREX system   suspended indirect light              | White     | 3000-26-29      | 900141W5    |
| STREX system   custom cut   suspended indirect light | White     | 2001-2999-26-29 | 900141W5CC  |
| STREX system   surface/suspended                     | Champagne | 3000-26-29      | 90014385    |
| STREX system   custom cut   surface/suspended        | Champagne | 2001-2999-26-29 | 90014385CC  |
| STREX system   surface/suspended                     | Bronze    | 3000-26-29      | 90014386    |
| STREX system   custom cut   surface/suspended        | Bronze    | 2001-2999-26-29 | 90014386CC  |

[258262WQ5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.