




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____



Tubular ceiling suspended luminaire made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9005; 2000; phase-cut dim; light colour 2700 K; CRI ≥ 90; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by end-user;

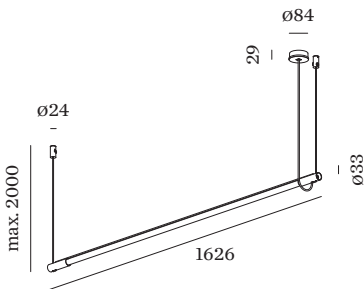

GENERAL

Ceiling _____
 Suspended _____
 Black Matt _____
 RAL 9005 ^a _____
 IP20 _____
 Interior _____
 2780 lm _____
 CIE flux code: 40 70 89 90 100 _____

LED

2700 K _____
 CRI ≥ 90 _____
 L70 / 50000h _____
 initial MacAdam ≤ 3 SDCM _____

OPTICAL

Opal _____

ELECTRICAL


phase-cut dim _____
 220 - 240 V _____
 system 21.8 W _____
 Class 2 _____

PHYSICAL

length 1624 mm _____
 width 33 mm _____
 height 33 mm _____
 0.42 kg _____
 cable length 2000 mm _____

^a Colour may deviate slightly due to production conditions.

LIGHT DISTRIBUTION



[‘2561T8B3’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.