



WEVER & DUCRÉ
LIGHTING

RAY OUTDOOR 1.0

735464B2 911041D1

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Surface

Black Matt

Inset: Dark Grey Texture

RAL 9011 ^a

IP65

Exterior

580 lm

LED

2700 K

3-step binning

OPTICAL

Flood

Beam angle 21°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 8.0 W

Class 1

Safety distance 0.3 m


PHYSICAL

Diameter 114 mm

Height 100 mm

0.6 kg

^a Color may deviate slightly due to production conditions.

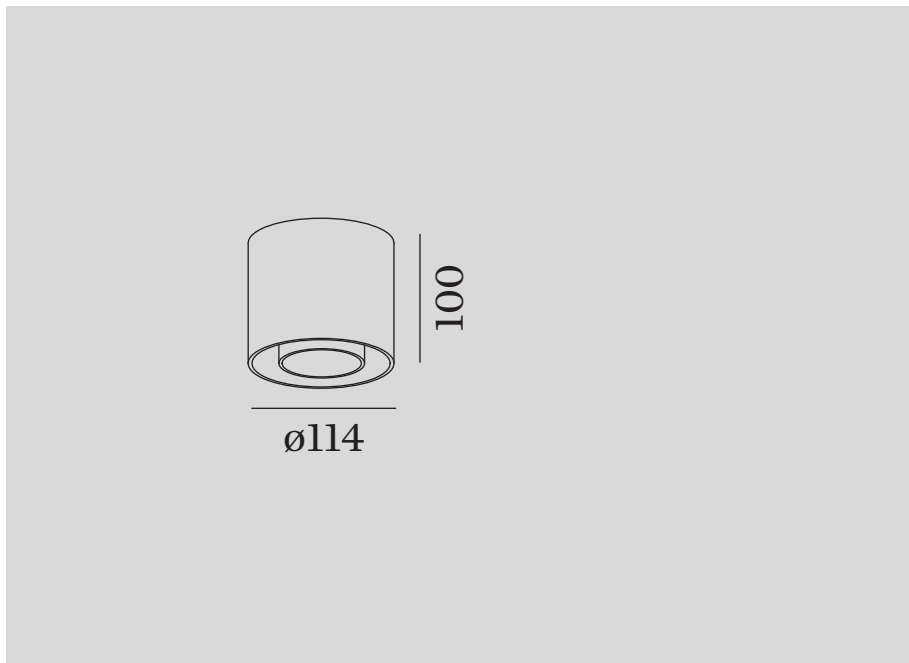

Cylindrical ceiling surface mounted downlight made from die-cast aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; optional single inner reflector and single inner cover available; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; 220 - 240 V; degree of protection IP65; PC1; light source replaceable by an authorized professional;



WEVER & DUCRÉ
LIGHTING

RAY OUTDOOR 1.0

735464B2 911041D1

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.95	0.9	0.85	0.8	0.76
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

OPTICAL

Single Inner Cover

TYPE	COLOUR	Ø-H (MM)	ORDERCODE
RAY max. 10W	Anthracite Grey	Ø 67-54	9 1 1 0 4 1 A 1
RAY max. 10W	Black	Ø 67-54	9 1 1 0 4 1 B 1
RAY max. 10W	Dark Grey Texture	Ø 67-54	9 1 1 0 4 1 D 1
RAY max. 10W	White	Ø 67-54	9 1 1 0 4 1 W 1