




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

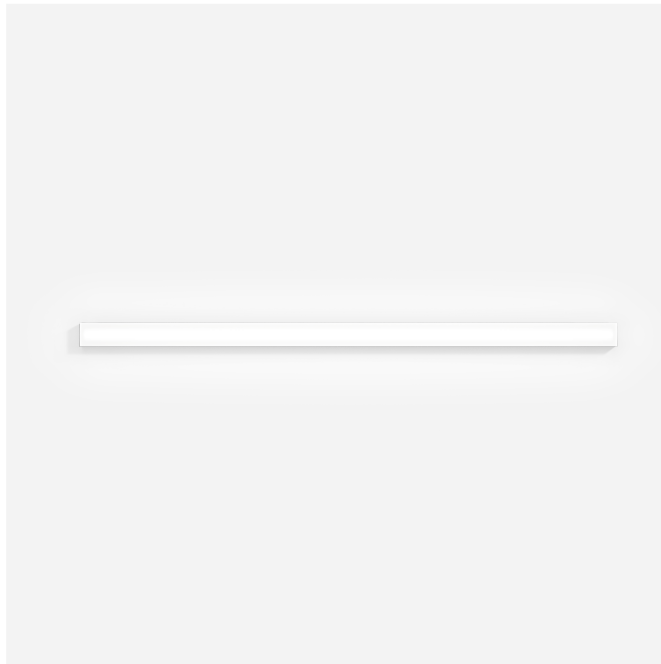

Wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; opal PMMA; PCB 3-step binning; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source not replaceable;



GENERAL

Wall _____
 Surface _____
 White Matt + Clear/Opal _____
 PMMA _____
 IP44 _____
 Interior _____
 CIE flux code: 49 77 94 94 100 _____

MEASURED DRIVERS

High Output _____
 750 lm _____
 18 W _____
 Low Output _____
 550 lm _____
 12 W _____

LED

2700 K _____
 CRI ≥ 90 _____
 initial MacAdam ≤ 3 SDCM _____

OPTICAL

Opal _____

ELECTRICAL

incl. output selector | phase-cut dim _____
 220 - 240 V _____
 system 18.0 12.0 W _____
 Class 1 _____

PHYSICAL

length 900 mm _____
 width 40 mm _____
 height 42 mm _____
 2.42 kg _____

[329388W3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.93	0.91	0.89
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.