





PROJECT

TYPE

NOTES

QUANTITY

DATE

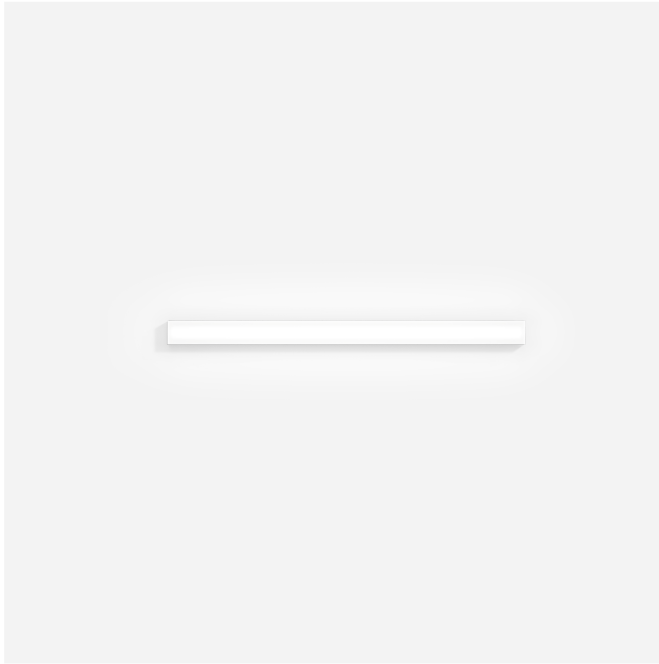

Wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; opal PMMA; PCB 3-step binning; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source not replaceable;

GENERAL

Wall
Surface
White Matt + Clear/Opal
PMMA
IP44
Interior
CIE flux code: 49 77 94 94 100

MEASURED DRIVERS

Low Output
365 lm
7 W

High Output
620 lm
12 W

LED

3000 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM

OPTICAL


Opal

ELECTRICAL

incl. output selector | phase-cut dim
220 - 240 V
system 7.0 12.0 W
Class 1

PHYSICAL

length 600 mm
width 40 mm
height 42 mm
1.53 kg



[329288W5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.93	0.91	0.89
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.