




**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_


**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_

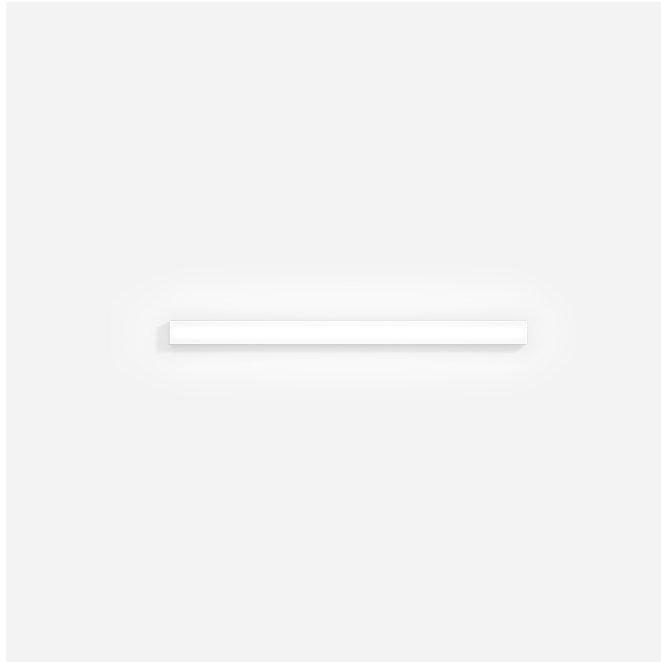

Wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; opal PMMA; PCB 3-step binning; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source not replaceable;



**GENERAL**

Wall \_\_\_\_\_  
 Surface \_\_\_\_\_  
 White Matt + Clear/Opal \_\_\_\_\_  
 PMMA \_\_\_\_\_  
 IP44 \_\_\_\_\_  
 Interior \_\_\_\_\_  
 CIE flux code: 49 77 94 94 100 \_\_\_\_\_

**MEASURED DRIVERS**

Low Output \_\_\_\_\_  
 320 lm \_\_\_\_\_  
 7 W \_\_\_\_\_  
 High Output \_\_\_\_\_  
 550 lm \_\_\_\_\_  
 12 W \_\_\_\_\_

**LED**

2700 K \_\_\_\_\_  
 CRI  $\geq 90$  \_\_\_\_\_  
 initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

**OPTICAL**

Opal \_\_\_\_\_

**ELECTRICAL**

incl. output selector | phase-cut dim \_\_\_\_\_  
 220 - 240 V \_\_\_\_\_  
 system 7.0 12.0 W \_\_\_\_\_  
 Class 1 \_\_\_\_\_

**PHYSICAL**

length 600 mm \_\_\_\_\_  
 width 40 mm \_\_\_\_\_  
 height 42 mm \_\_\_\_\_  
 1.53 kg \_\_\_\_\_

[‘329288W3’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



**Maintenance Factor**

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.93	0.91	0.89
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.