



PROJECT

---

TYPE

---

NOTES



---

QUANTITY

---

DATE

---

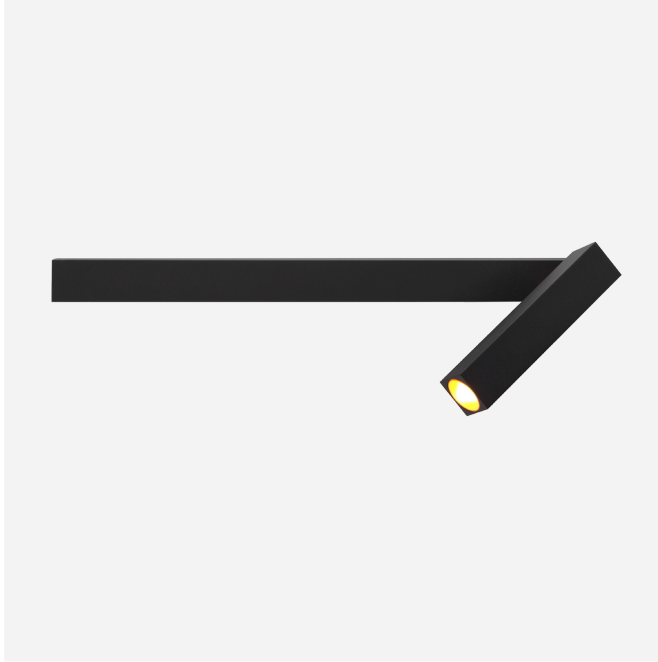


Wall surface spotlight made from die-cast aluminium; with rectangular base; surface Black Matt + Gold; powder coated and wet painted; matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; beam angle 23°; 220 - 240 V; 350° rotatable and 90° tiltable; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

**GENERAL**

Wall  
 Surface  
 tilt max 90 °  
 rotation 350 °  
 Black Matt + Gold  
 RAL 9005 <sup>a</sup>  
 IP20  
 Interior  
 CIE flux code: 90 98 100 100 100

**LIGHT DISTRIBUTION**



**LED**

3000 K  
 CRI  $\geq 90$   
 L80 / 50000 h  
 initial MacAdam  $\leq 2$  SDCM

**OPTICAL**

Standard  
 beam angle 23°


**ELECTRICAL**

phase-cut dim  
 220 - 240 V  
 7.4 W  
 Class 1

**PHYSICAL**

length 130 mm  
 width 26 mm  
 height 26 mm  
 0.35 kg

<sup>a</sup> Colour may deviate slightly due to production conditions.



[159344K5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.


**CONE DIAGRAM**

standard 18°

h (m)	E0° (lx)	ø (m)
1	1470	0.31
2	370	0.62
3	160	0.93
4	90	1.25
5	60	1.56

**Maintenance Factor**

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

 MF  $LMF \times RSMF \times LLMF \times LSF$ 

MF Maintenance Factor

 $LMF^a$  Luminaire Maintenance Factor

 $RSMF^a$  Room Surface Maintenance Factor

LLMF Lamp Lumens Maintenance Factor

LSF Lamp Survival Factor

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.