



**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_


**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_



Round ceiling recessed downlight made from die-cast aluminium; adjustable; surface Black Matt; powder coated, matt texture; RAL 9005; inner ring black; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; beam angle 31°; 355° rotatable and 60° tiltable; degree of protection IP20; Class 3; IC rated; driver not included; to be combined with the plasterkit suitable for ceiling thickness; optional honeycomb louver available, to reduce glare; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



**GENERAL**

Ceiling \_\_\_\_\_

Semi-Recessed \_\_\_\_\_

tilt max 60° \_\_\_\_\_

rotation 355° \_\_\_\_\_

Black Matt \_\_\_\_\_

RAL 9005<sup>a</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

IC rated \_\_\_\_\_

Interior \_\_\_\_\_

CIE flux code: 99 100 100 100 \_\_\_\_\_

100 \_\_\_\_\_

**LED**

3000 K \_\_\_\_\_

CRI  $\geq 90$  \_\_\_\_\_

L70 / 55000h \_\_\_\_\_

initial MacAdam  $\leq 2$  SDCM \_\_\_\_\_

**OPTICAL**

Standard \_\_\_\_\_

beam angle 31° \_\_\_\_\_

**ELECTRICAL**

excl. driver \_\_\_\_\_

17 V \_\_\_\_\_

inset 6.0 W \_\_\_\_\_

Class 3 \_\_\_\_\_

**PHYSICAL**

diameter 35 mm \_\_\_\_\_

height 55 mm \_\_\_\_\_

0.17 kg \_\_\_\_\_

alu plasterkit \_\_\_\_\_

**CUTOUT**

diameter 78-80 mm \_\_\_\_\_

recessed depth 80 mm \_\_\_\_\_

12,5, 15,25 \_\_\_\_\_


<sup>a</sup> Colour may deviate slightly due to production conditions.

**MEASURED DRIVER**

350mA \_\_\_\_\_

530 lm \_\_\_\_\_

8 W \_\_\_\_\_

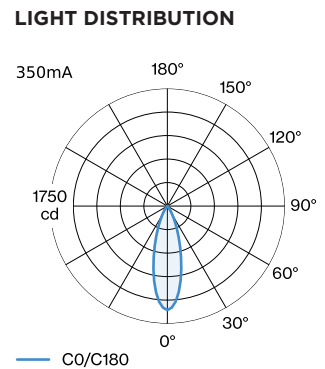

[164561B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



**CONE DIAGRAM**

standard 30° 350mA

h (m)	E0° (lx)	ø (m)
1	1550	0.54
2	390	1.09
3	170	1.63
4	100	2.17
5	60	2.71

**Maintenance Factor**

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.92	0.87	0.83	0.79	0.75
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

<sup>a</sup>According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

**ELECTRICAL ACCESSORIES**

**Driver**

Type	Voltage	L·W·H (MM)	Item number
6W   350mA   8.6-18V	8.6-18V	67·39·22	90213303
10W   350mA   1-10V dim	14-28V	101.5·51·29.5	90223401
10W   350mA   phase-cut dim	12-28V	102·38·21	90223402
14W   350mA   2.5-42V	2.5-42V	145·33·21	90243501
17W   350mA   10-49V   DALI	10-49V	108·52·22	90243601

**OPTICAL ACCESSORIES**

**Honeycomb Louver**

Type	Colour	Ø (MM)	Item number
BLIEK PETIT   CENO   LECA   PIRRO	Black	29	90051131

**MOUNTING ACCESSORIES**

**Plasterkit**

Type	Ø·H (MM)	Item number
BLIEK PETIT TRIMLESS	73·29	90017210

[164561B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.