



PROJECT

---

TYPE

---

NOTES


---

QUANTITY


---

DATE

---

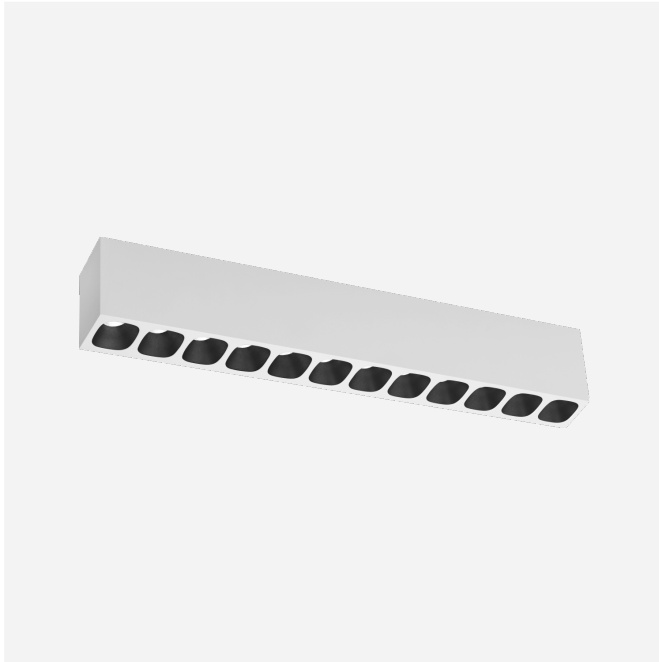

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface White Matt + Black Matt; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; beam angle 28°; degree of protection IP20; Class 1; UGR  $\leq 13$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 3000$  cd/m<sup>2</sup>; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



**GENERAL**

Ceiling \_\_\_\_\_  
 Surface \_\_\_\_\_  
 White Matt + Black Matt \_\_\_\_\_  
 IP20 \_\_\_\_\_  
 Interior \_\_\_\_\_  
 1810 lm \_\_\_\_\_  
 CIE flux code: 98 100 100 100 \_\_\_\_\_  
 100 \_\_\_\_\_

**LED**

3000 K \_\_\_\_\_  
 CRI  $\geq 90$  \_\_\_\_\_  
 L80 / 50000h \_\_\_\_\_  
 initial MacAdam  $\leq 3$  SDCM \_\_\_\_\_

**OPTICAL**

Standard \_\_\_\_\_  
 beam angle 28° \_\_\_\_\_

**ELECTRICAL**

phase-cut dim \_\_\_\_\_  
 220 - 240 V \_\_\_\_\_  
 system 26.8 W \_\_\_\_\_  
 Class 1 \_\_\_\_\_

**PHYSICAL**

length 322 mm \_\_\_\_\_  
 width 31 mm \_\_\_\_\_  
 height 50 mm \_\_\_\_\_  
 0.38 kg \_\_\_\_\_

[129954E5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.