



STIPO 1.0 / 2.0

INSTALLATION INSTRUCTIONS | NOVEMBER 2021

Fix to the base plate

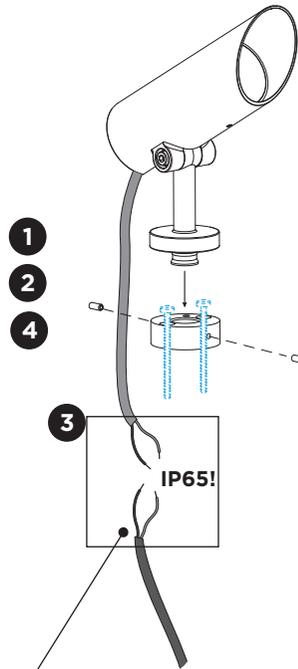

Fix to the groundspike

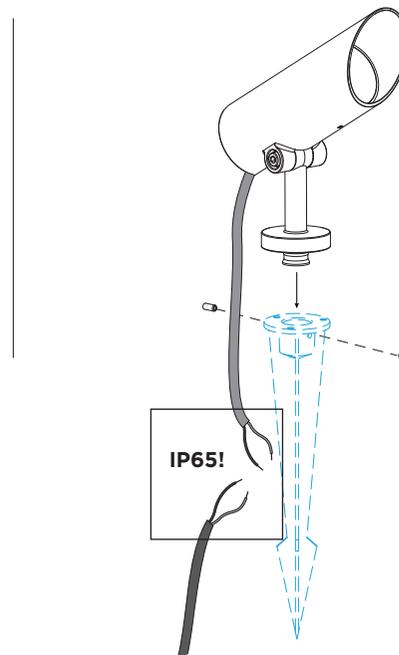

DIMENSIONS



STIPO 1.0



STIPO 2.0

MOUNTING INSTRUCTION

- 1 Remove the base plate by loosening the side screws.
- 2 Fix the base plate to the ground with screws (screws are not included).
Or optional: fix the base plate to the groundspike with screws (screws are not included).
- 3 **POWER CONNECTION**
Connect to 220-240V. Connect the wires with the waterproof connectors.
- 4 Fix the luminaire to the base plate or the groundspike with the side screws.

Included:

waterproof connectors:




Optional:

IP68 connection box:

order ref. 73240706 = 2 WAYS 2x1,5 Ø6-8mm

base plate dimensions



groundspike dimensions



Caution, risk of electric shock

The light source of the integrated LED is not replaceable; when the light source reaches its end of life the whole luminaire needs to be replaced.

PB19-010-432-00_V1