




**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_

**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_

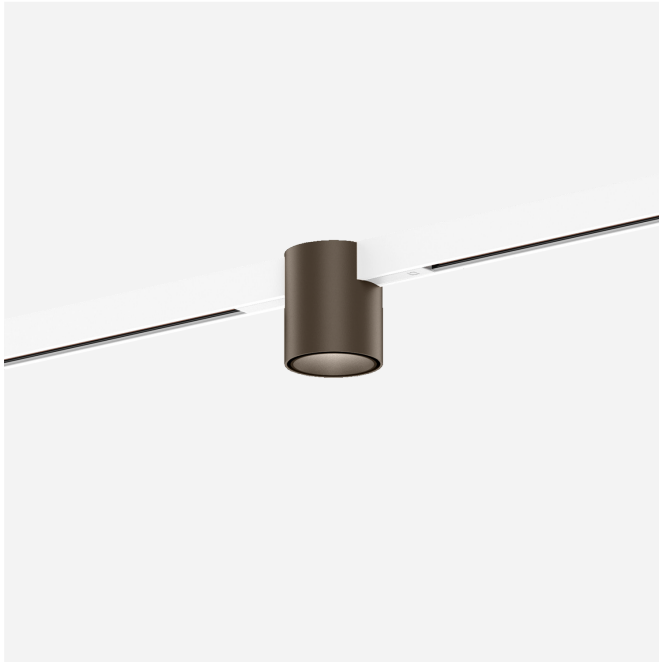

48V track downlight made from die-cast aluminium; cylindrical shape; for surface and suspended tracks; adapter in White Matt; surface housing Bronze wet painted; brushed; with inner reflector in Bronze wet painted; matt fine texture; with COB (Chip on Board) technology for maximum efficiency; non dim; light colour 2700 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; CRI (Colour Rendering Index)  $\geq 90$ ; 48 V; degree of protection IP20; Class 3; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by an authorized professional;

**GENERAL**

- \_\_\_\_\_ Ceiling
- \_\_\_\_\_ Track
- \_\_\_\_\_ White Matt
- \_\_\_\_\_ Adapter White Matt
- \_\_\_\_\_ Housing + Inner Reflector
- \_\_\_\_\_ Bronze
- \_\_\_\_\_ IP20
- \_\_\_\_\_ Interior
- \_\_\_\_\_ 440 lm

**LED**

- \_\_\_\_\_ 2700 K
- \_\_\_\_\_ CRI  $\geq 90$
- \_\_\_\_\_ initial MacAdam  $\leq 2$  SDCM

**OPTICAL**


- \_\_\_\_\_ Standard
- \_\_\_\_\_ beam angle 25°

**ELECTRICAL**

- \_\_\_\_\_ non dim
- \_\_\_\_\_ 48 V
- \_\_\_\_\_ inset 7.0 W
- \_\_\_\_\_ Class 3

**PHYSICAL**

- \_\_\_\_\_ diameter 70 mm
- \_\_\_\_\_ height 82 mm
- \_\_\_\_\_ 0.16 kg
- \_\_\_\_\_ adapter 171 mm
- \_\_\_\_\_ incl. Strex 48 V track adapter



[‘258262WQ3’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



## TRACK ACCESSORIES

### Blank Cover 2m

Type	Colour	L·W·H (MM)	Item number
STREX system	Black	2000-18-3	911002B0
STREX system	White	2000-18-3	911002W0

### Connector

Type	Colour	L·H (MM)	Item number
STREX system	White	105-18	90014196
STREX system	Black	105-18	90014197

### DALI Selv Device

Type	L·W·H (MM)	Item number
STREX system	213-37-25	90019193

### End Cap

Type	Colour	L·W·H (MM)	Item number
STREX system   surface/suspended	White	26-2.5-29	90014147
STREX system   surface/suspended	Black	26-2.5-29	90014148
STREX system   surface/suspended	Champagne	26-2.5-29	90014347
STREX system   surface/suspended	Bronze	26-2.5-29	90014348

### L-Connector

Type	Colour	L·W·H (MM)	Item number
STREX system   surface/suspended	White	105-105-19	90014198
STREX system   surface/suspended	Black	105-105-19	90014199
STREX system   surface/suspended	Champagne + Black	105-105-19	90014398
STREX system   surface/suspended	Bronze + Black	105-105-19	90014399

### L-Connector non-electrical

Type	Colour	L·W·H (MM)	Item number
STREX system   surface	White	105-105-19	90014258
STREX system   surface	Black	105-105-19	90014259
STREX system   surface	Champagne + Black	105-105-19	90014458
STREX system   surface	Bronze + Black	105-105-19	90014459

### Power Feed

Type	Colour	L·H (MM)	Item number
STREX system	Black	112-18	90014154

### Suspension Set

Type	Colour	L·W·H (MM)	Item number
STREX system   1.5m   suspended	Stainless Steel	80-23-1500	90014160
STREX system   3.0m   suspended	Stainless Steel	80-23-3000	90014161
STREX system   1.5m   suspended	Black	80-23-1500	90014274
STREX system   3.0m   suspended	Black	80-23-3000	90014275

### T-Connector

Type	Colour	L·W·H (MM)	Item number
STREX system   surface	White	275-146-18	90014292
STREX system   surface	Black	275-146-18	90014293


**Wireless Casambi Control**

Type	Colour	L-H (MM)	Item number
STREX system	White	143-58	90014155
STREX system	Black	143-58	90014156

**X-Connector**

Type	Colour	L-W-H (MM)	Item number
STREX system   surface	Black	275-275-18	90014294
STREX system   surface	White	275-275-18	90014295

**ELECTRICAL ACCESSORIES**
**Ceiling Driver 100W**

Type	Colour	L-W-H (MM)	Item number
STREX system   suspended	White	439-26-44	90014368
STREX system   suspended	Black	439-26-44	90014369

**Ceiling Driver 150W**

Type	Colour	L-W-H (MM)	Item number
STREX system   suspended	White	439-26-44	90014372
STREX system   suspended	Black	439-26-44	90014373

**Driver**

Type	Voltage	L-W-H (MM)	Item number
STREX system   100W	48V	350-30-18	90218901
STREX system   150W	48V	350-30-18	90218902
STREX system   250W	48V	400-40-22	90218903

**In Line Driver 100W**

Type	Colour	L-W-H (MM)	Item number
STREX system   suspended	White	439-26-44	90014360
STREX system   suspended	Black	439-26-44	90014361

**In Line Driver 150W**

Type	Colour	L-W-H (MM)	Item number
STREX system   suspended	White	439-26-44	90014362
STREX system   suspended	Black	439-26-44	90014363

**In Track Driver 100W**

Type	Colour	L-W-H (MM)	Item number
STREX system   surface	Black	438-16-18	90014143
STREX system   surface	White	438-16-18	90014144
STREX system   suspended	White	3000	90014157
STREX system   suspended	Black	3000	90014174
STREX system   surface	Black	468-26-29	90014176
STREX system   surface	White	468-26-29	90014178
STREX system   surface	Bronze + Black	468-26-29	90014376
STREX system   surface	Champagne + Black	468-26-29	90014378


**In Track Driver 250W**

Type	Colour	L-W-H (MM)	Item number
STREX system   surface	Black	408-16-18	90014145
STREX system   surface	White	408-16-18	90014146
STREX system   suspended	White	3000	90014158
STREX system   suspended	Black	3000	90014175
STREX system   surface	Black	438-26-29	90014177
STREX system   surface	White	438-26-29	90014179
STREX system   surface	Bronze + Black	438-26-29	90014377
STREX system   surface	Champagne + Black	438-26-29	90014379

**Power Feeder for Suspension**

Colour	Item number
Black Texture	90018000

**TRACKS**
**Track Profile 1m**

Type	Colour	L-W-H (MM)	Item number
STREX system   surface/suspended	White	1000-26-29	90014181
STREX system   custom cut   surface/suspended	White	200-999-26-29	90014181CC
STREX system   surface/suspended	Black	1000-26-29	90014182
STREX system   custom cut   surface/suspended	Black	200-999-26-29	90014182CC

**Track Profile 2m**

Type	Colour	L-W-H (MM)	Item number
STREX system   suspended indirect light	Black	2000-26-29	900140B5
STREX system   custom cut   suspended indirect light	Black	1000-1999-26-29	900140B5CC
STREX system   suspended indirect light	White	2000-26-29	900140W5
STREX system   custom cut   suspended indirect light	White	1000-1999-26-29	900140W5CC
STREX system   surface/suspended	White	2000-26-29	90014183
STREX system   custom cut   surface/suspended	White	1001-1999-26-29	90014183CC
STREX system   surface/suspended	Black	2000-26-29	90014184
STREX system   custom cut   surface/suspended	Black	1001-1999-26-29	90014184CC
STREX system   surface/suspended	Champagne	2000-26-29	90014383
STREX system   custom cut   surface/suspended	Champagne	1001-1999-26-29	90014383CC
STREX system   surface/suspended	Bronze	2000-26-29	90014384
STREX system   custom cut   surface/suspended	Bronze	1001-1999-26-29	90014384CC

**Track Profile 3m**

Type	Colour	L-W-H (MM)	Item number
STREX system   surface/suspended	White	3000-26-29	90014185
STREX system   custom cut   surface/suspended	White	2001-2999-26-29	90014185CC
STREX system   surface/suspended	Black	3000-26-29	90014186
STREX system   custom cut   surface/suspended	Black	2001-2999-26-29	90014186CC
STREX system   suspended indirect light	Black	3000-26-29	900141B5
STREX system   custom cut   suspended indirect light	Black	2001-2999-26-29	900141B5CC
STREX system   suspended indirect light	White	3000-26-29	900141W5
STREX system   custom cut   suspended indirect light	White	2001-2999-26-29	900141W5CC
STREX system   surface/suspended	Champagne	3000-26-29	90014385
STREX system   custom cut   surface/suspended	Champagne	2001-2999-26-29	90014385CC
STREX system   surface/suspended	Bronze	3000-26-29	90014386
STREX system   custom cut   surface/suspended	Bronze	2001-2999-26-29	90014386CC

[258262WQ3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.